


Canadian 0 - 30mHz Band Plan

Effective Date: January 1, 2015

- **1.** This is a simplified version of the official RAC Band Plan. Not all permissible modes/activities are represented.
- **2.** LSB is used on 160,80 and 40M. USB is used on all other bands that permit SSB, including 60M.
- **3.** Narrow Digital modes are up to 500 Hz bandwidth. Digital includes all digital modes.
- **4.** Maximum bandwidth permitted on 2200M is 100 Hz. Maximum power is 1 Watt EIRP.
- **5.** Maximum power on 600M band is 5 Watts EIRP, with recommended maximum bandwidth of 1 KHz. Details are still being developed.
- **6.** Refer to the IC and RAC websites for full details before operating on the new 60M channels.
- 7. Remember not to allow your signal to spill over into adjoining band segments when operating close to the edges. During major weekend contests, activity in certain modes can spill over into other segments.
- **8.** This graphic is a living document and will be reviewed and updated periodically to reflect changes in the band plans and operating habits.

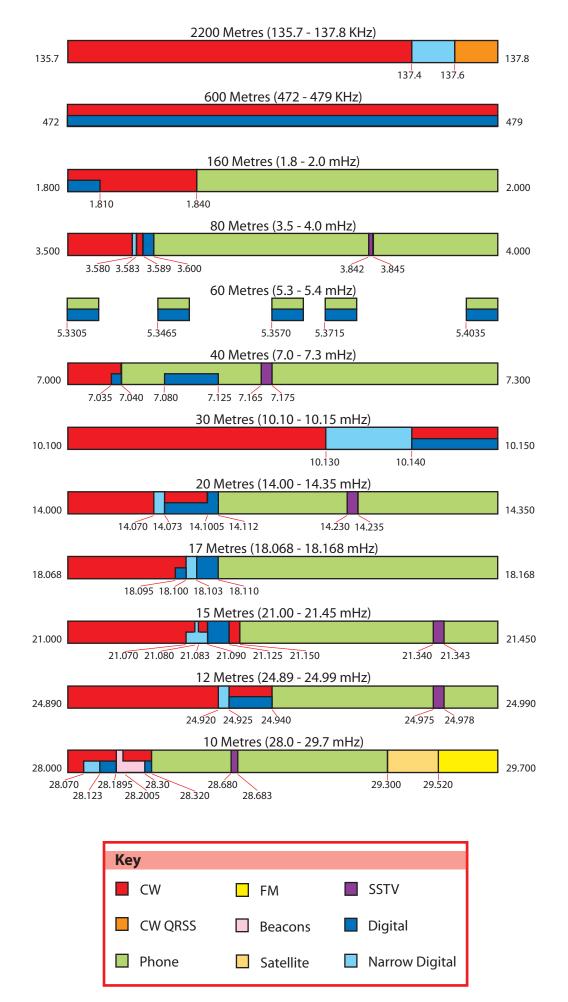

www.rac.ca